



# Model 3000-VFG-C




Capacity in m<sup>3</sup>/hour at static pressure of:


| MODEL      | 10Pa | 20Pa | 40Pa |
|------------|------|------|------|
| 3000-VFG-C | 2900 | 4100 | 5800 |



## Model 3000-VFG-C

Flange model with the flange on the front side for almost all applications. Divided air direction; up to 35% air enters only from the top side; above 35% also from the bottom side. For the control, the inlet is equipped with one stainless steel central arm. This inlet is executed with a curved inner flap.

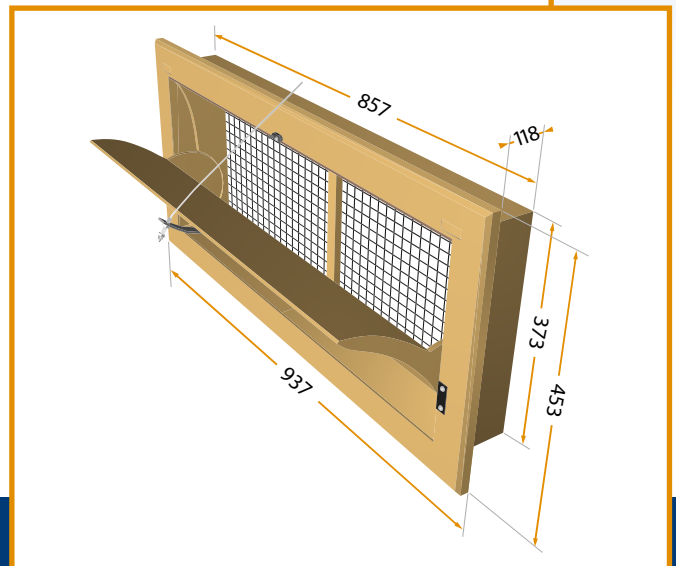

 Member of SP Group A/S

### TPI-Polytechniek BV

De Steenbok 24  
5215 ME 's-Hertogenbosch  
The Netherlands

Phone: +31 (0)73-656 91 94  
Fax: +31 (0)73-656 69 33

E-mail: [info@tpi-polytechniek.com](mailto:info@tpi-polytechniek.com)  
Internet: [www.tpi-polytechniek.com](http://www.tpi-polytechniek.com)